



# Revlon Perfect Heat Jumbo 3 Barrel Waver Teardown

This guide will show step by step instructions on how to disassemble the Revlon Perfect Heat Jumbo 3 Barrel Waver.

Written By: Kyle Weeks






## TOOLS:

- [Screwdriver](#) (1)

Phillips

---

## Step 1 — Lever and Spring


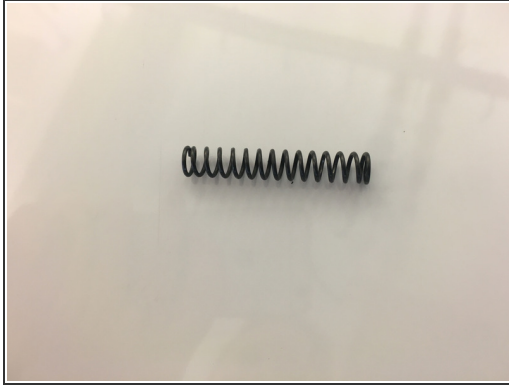


 Make sure your the device is unplugged before starting this teardown.

 The device used in this tear-down is missing the lever and spring.


- Remove these items by lifting up on the lever until it pops out of place. The spring should come out easily.

## Step 2 — Securing Screws

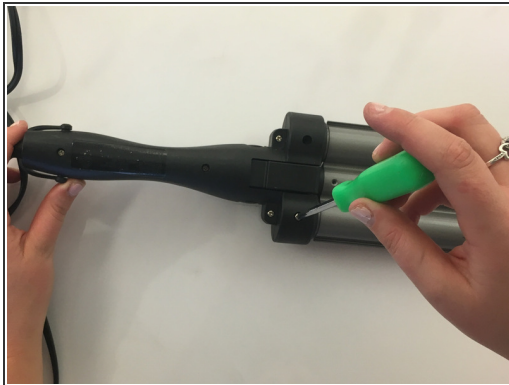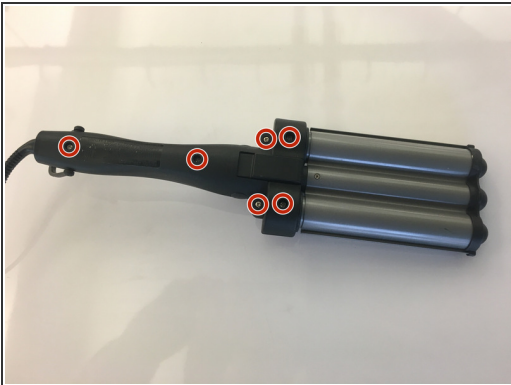


- Remove all of the screws on the back of the plastic covering.

### Step 3 — Handle Casing

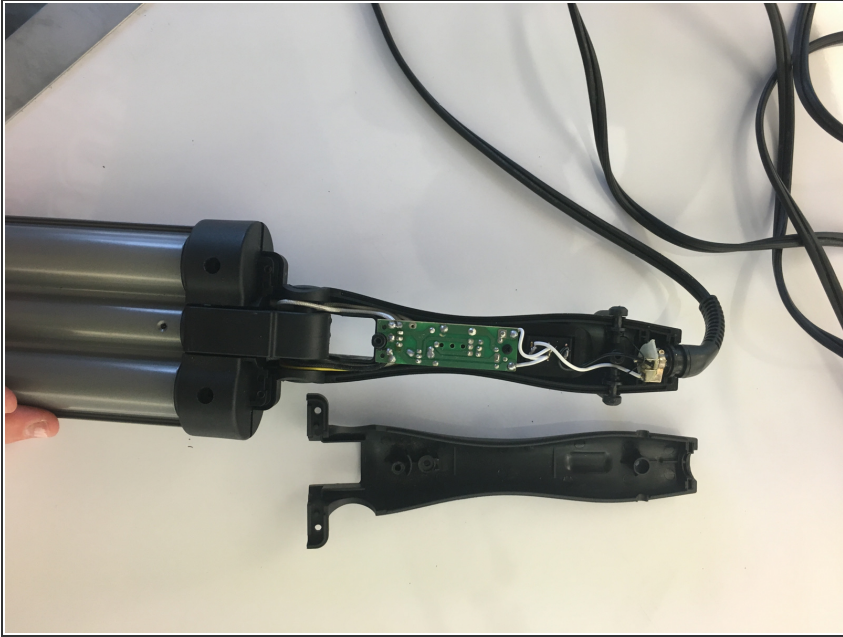

- Remove the plastic handle cover by lifting it straight up.


### Step 4 — Circuit Securing Screw

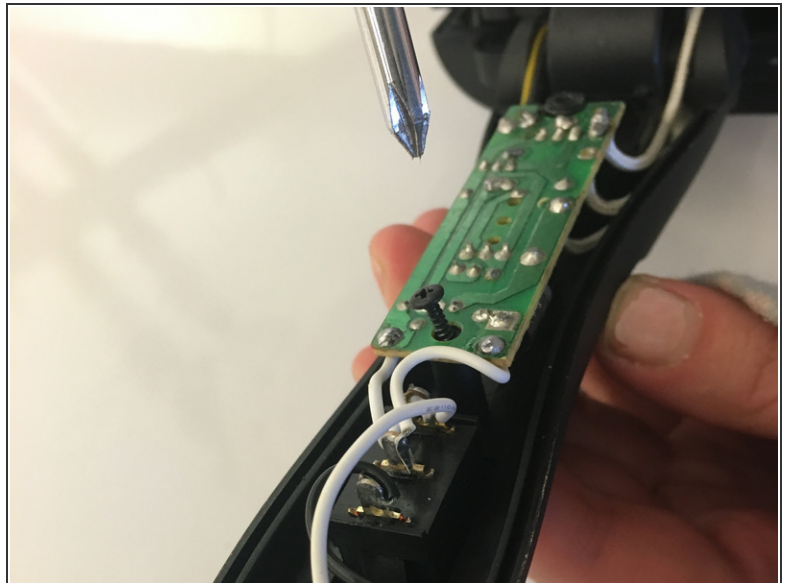

- Remove the small black screw that is holding the circuit board in place.




## Step 5 — Power Cord

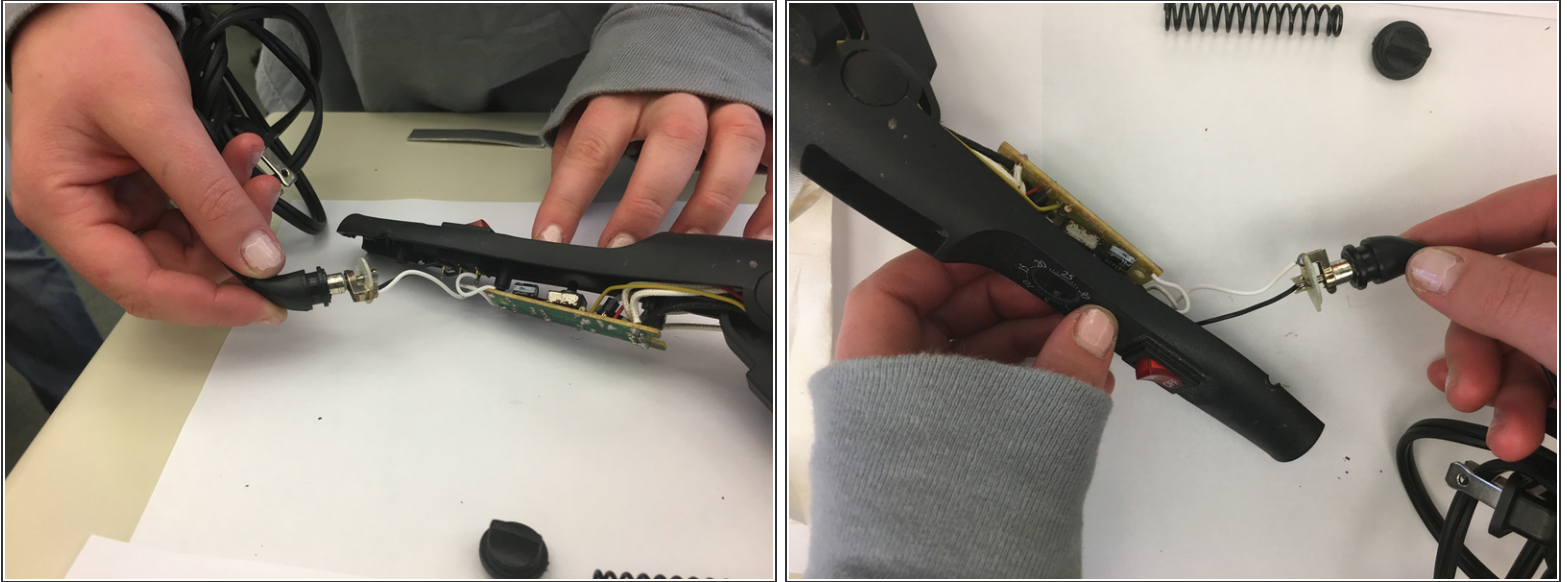

- Remove the power cord from the power port of the Waver by holding the port with one hand and pulling on the cord with the other hand.

## Step 6 — Metal Heating Cylinders

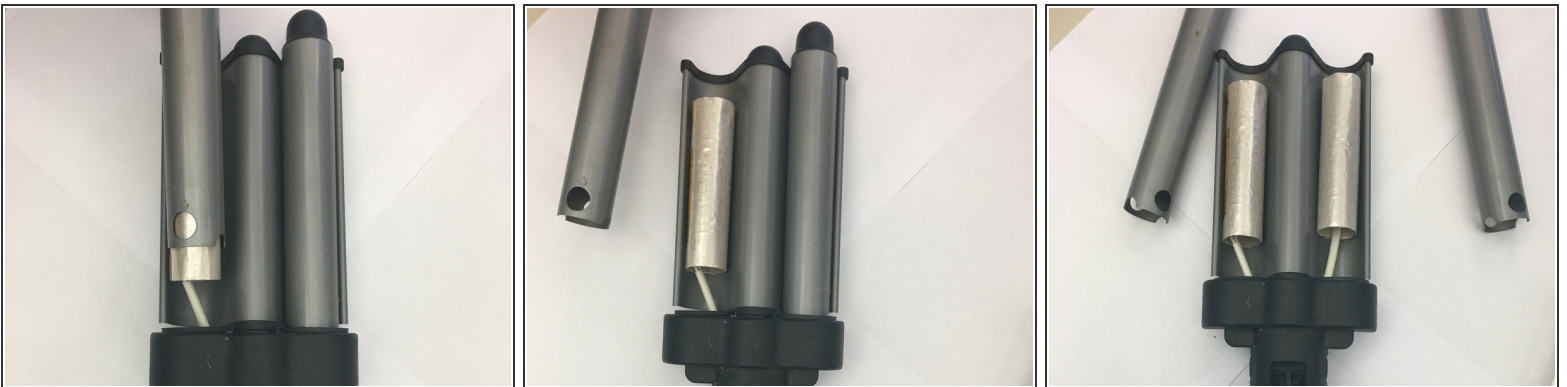

- Remove the two metal cylinders by sliding them down the length of the inner soft cylinders.


⚠ The internal ceramic cylinders are very soft and tear easily. Be careful not to damage them.

## Step 7 — Cylinder Securing Fixtures



- Remove the plastic cylinder holders by lifting them up and along the length of the cylinder.


## Step 8 — Rear Metal Plate

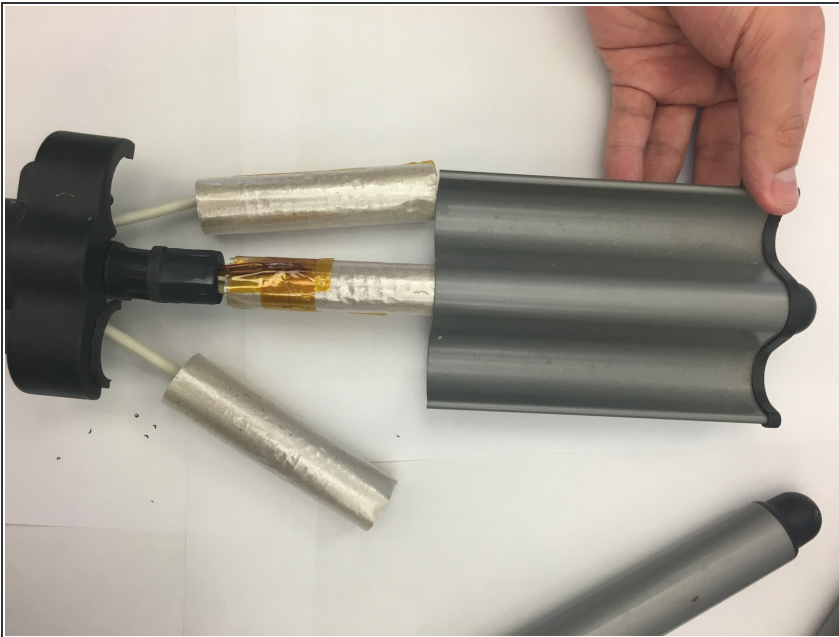

- Similar to step 4, remove the back metal plate by sliding down the length of the intern cylinder.
- ⚠ The internal cylinder is very soft and tears easily. Be careful not to damage it.



## Step 9 — Heat Control Dial

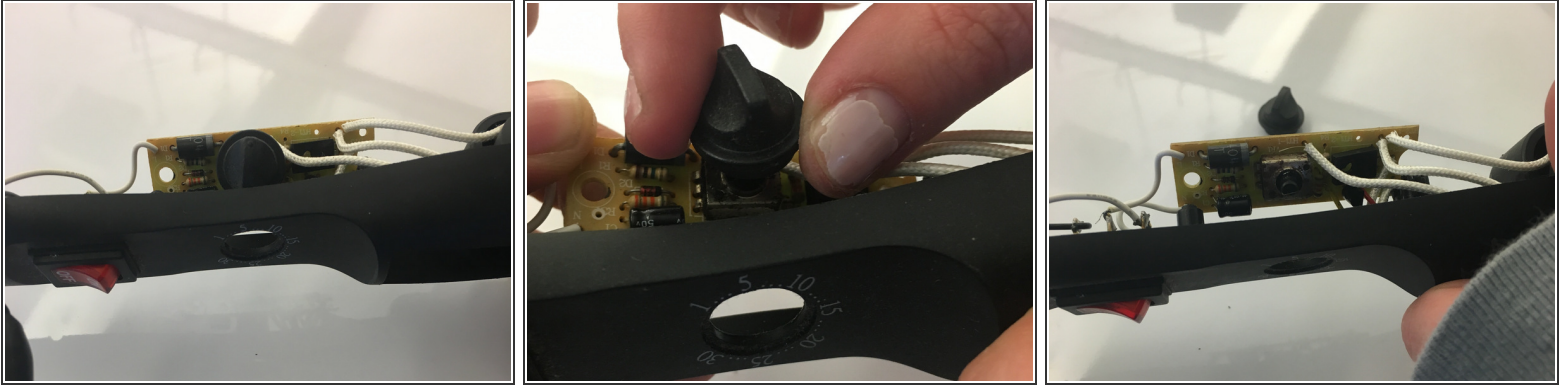

- Gently lift the circuit board and tilt it to the side.
- Lift the dial straight up from the circuit board. It should come off easily.

## Step 10 — Full Teardown



- Here are all of the safely removeable components of the waver